



GEN-AIR AIR MOVER

3-Speed Air Mover

Model Number: 90-0000

Take on the toughest drying jobs with confidence. The Gen-Air Air Mover combines industrial strength with smart design to deliver unmatched results.

Why Pros Choose Gen-Air:

- ▶ **Serious Power** ½-HP, 3-speed motor delivers the airflow you need to dry surfaces fast and help prevent musty air.
- ▶ **Precision Engineering** 10" steel blade fan and frame with a 14" chassis opening for maximum airflow.
- ▶ **Safety First** Air intake and outlet screens keep debris out and fingers safe from the powerful steel blades.
- ▶ **Versatile Positioning** Operates at three angles, including 45° and 90°, so you can aim airflow at floors, walls, ceilings, and curtains.
- ▶ **Space-Saving Design** Stack up to three units for easy storage.
- ▶ **Built Tough** Roto-molded polyethylene body resists dents, chips, and cracks — easy to clean and always professional-looking.
- ▶ **Ready to Work** Includes a 20-foot, heavy-duty safety power cord for maximum reach.

KEY FEATURES + BENEFITS

- ▶ Three adjustable speeds customize airflow for any job.
- ▶ Tilts to 45° or 90° angles to direct air where it is needed the most.
- ▶ Quickly evaporates moisture from carpets, walls, and furniture, helping prevent costly mold and mildew.
- ▶ Lightweight and portable — easy to move, easy to position — perfect for homes, offices, and commercial spaces.
- ▶ Balanced design with molded carrying handle that makes transporting easy.
- ▶ Air intake and outlet screens keep airflow free from debris and protect fingers from the powerful steel fan blades.
- ▶ Stack up to three units for easy storage. Handle fits conveniently into the bottom of the air mover to stack easily and safely.



WARRANTY

Housing	Motor	Electrical Component
Limited Lifetime	1 years	1 year


SPECIFICATION

Model No.	90-0000
Motor	1/2 HP, 115 V
3-Speed Fan	Low-780 RPM Medium-1000 RPM High-1150 RPM
Air Flow Rates	1500 CFM 1900 CFM 2400 CFM
Dimension	19.2"L x 14.5"W x 19.5"H
Machine Weight	32 lbs.
Shipping Weight	36 lbs.

BUILT IN HUNTINGTON BEACH, CALIFORNIA

Final assembly, quality control, and warranty service all handled at our California manufacturing facility. Replacement parts stocked domestically and typically ship within 24 hours.

Gen-Air delivers an impressive 2,400 CFM—far above the industry standard of just 1,700 CFM. That means faster drying, better airflow, and superior performance every time.

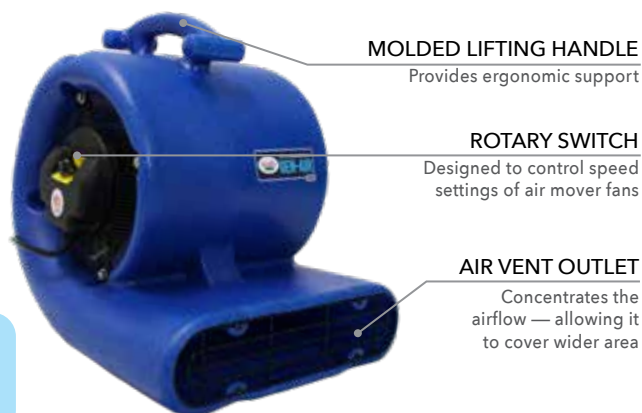

⚠ California Proposition 65 ⚠
Warning: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.



For technical support, email us at:
usgtechsupport@us-group.com